


TREMESELE HOLDING
CONSTRUCTION & DEVELOPMENT

R O S E D A L E V I L L A S

LOCATION: YENİBOĞAZIÇI

PROJECT TYPE VILLA 2+1 / 3+1 / 4+1

DUBLEX 3+1 230 M²,
DUBLEX 4+1 270M²
BUNGALOW 2+1 120 M²
BUNGALOW 3+1 150 M²
TWINS 3+1 170 M²

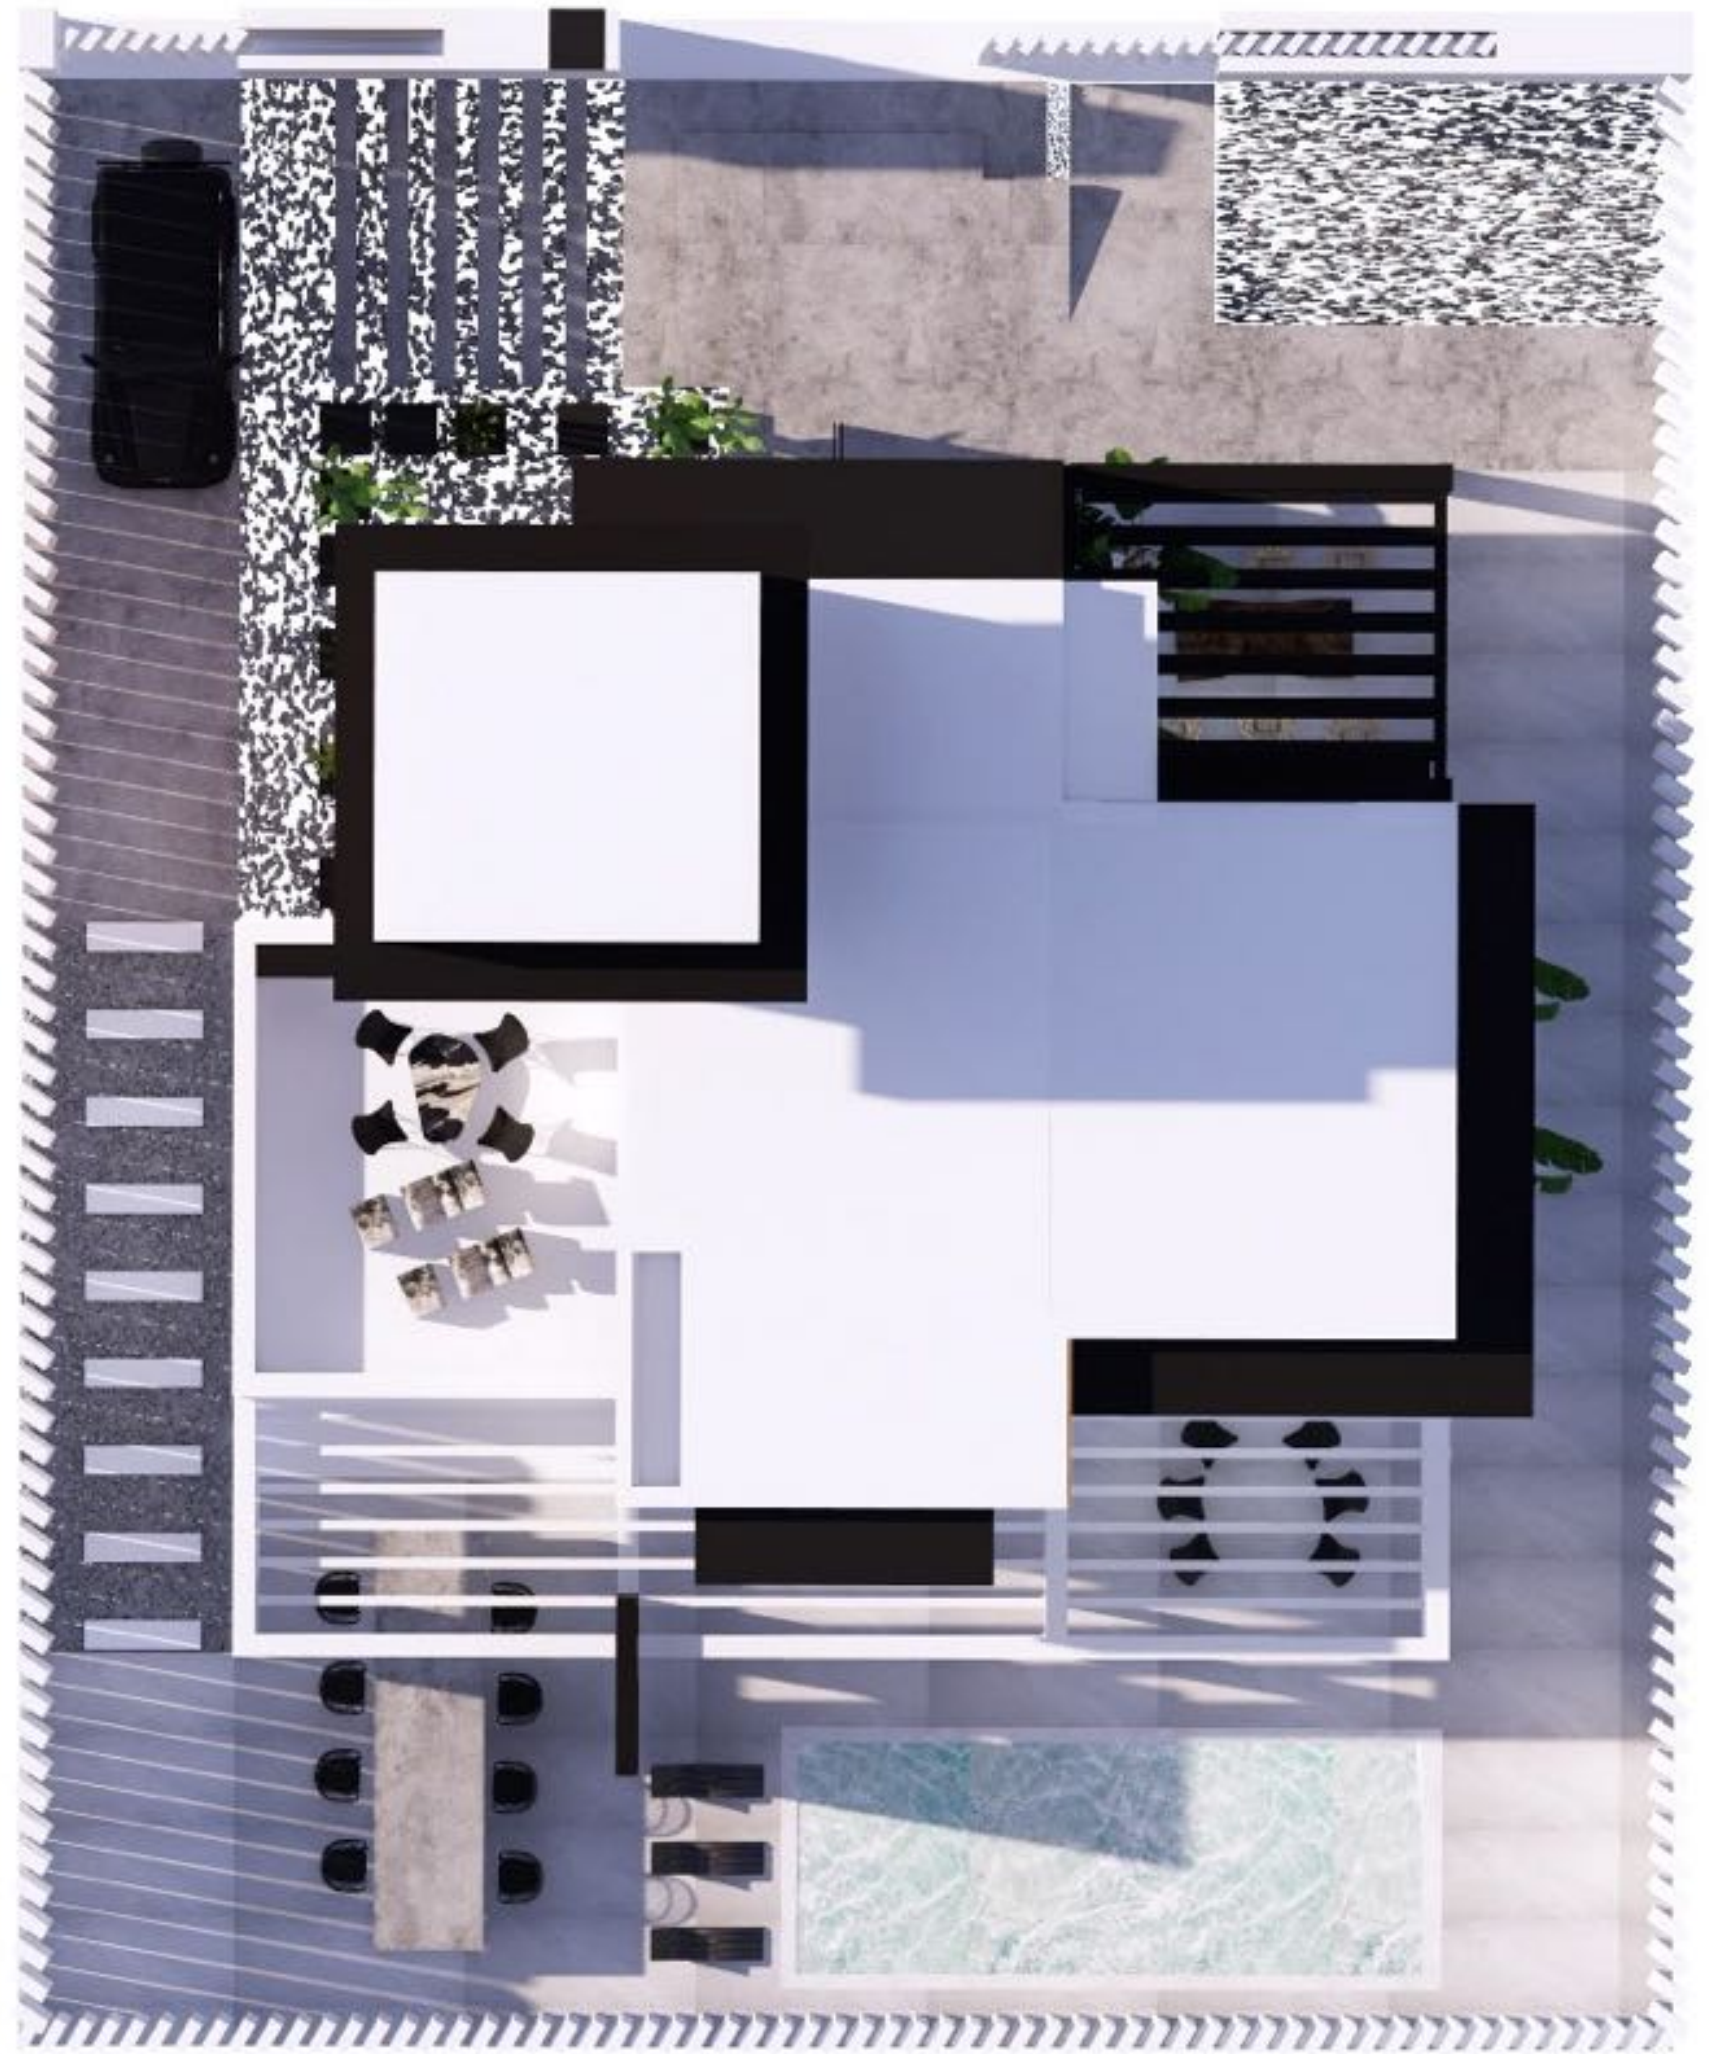

R O S E D A L E
V I L L A S

ALPLANA

ADRESS: CARRER EL PINET, 1, 12592 CHILCHES, CASTELLÓN, SPAIN

FLOOR CERAMICS

9MM THICK CERAMIC, NOT AFFECTED BY WATER AND
IMPACT
SUITABLE FOR BOTH INDOOR AND OUTDOOR AND
WET FLOORS



ALPLANA P.E TENBY GREY PORCELAIN MATE SLIPSTOP REC. 60X120



SLIP-STOP



MATE
MATT



REVESTIMIENTO
WALL TILES



PAVIMENTO
FLOOR TILES



ANTI-HIELO
FROST PROOF



DIFERENTES GRÁFICAS
DIFFERENT PRINTINGS



ALPLANA BODO WHITE PORCELAIN MATE SLIPSTOP REC. 60X120



SLIP-STOP



MATE
MATT



REVESTIMIENTO
WALL TILES



PAVIMENTO
FLOOR TILES



ANTI-HIELO
FROST PROOF



DIFERENTES GRÁFICAS
DIFFERENT PRINTINGS



ALPLANA P.E TENBY ANTRACIT PORCELAIN MATE SLIPSTOP REC. 60X120



SLIP-STOP



MATE
MATT




REVESTIMIENTO
WALL TILES



PAVIMENTO
FLOOR TILES



ANTI-HIELO
FROST PROOF



DIFERENTES GRÁFICAS
DIFFERENT PRINTINGS

R O S E D A L E
V I L L A S

HASGROHE SE

ADRESS: SCHILTACH , GERMANY

SHOWER SYSTEMS

HANSGROHE SHOWER SYSTEMS CONSIST OF AN OVERHEAD AND HAND SHOWER, WHICH ARE CONNECTED TO EACH OTHER VIA A RAIL. FOR EXTRA COMFORT, YOU CAN ALSO GET VARIANTS WITH A BUILT-IN SINGLE LEVER TAP OR A THERMOSTATIC MIXER. MULTI-JET OVERHEAD SHOWERS WITH A MASSAGE EFFECT TRANSFORM THE SHOWER INTO A DAILY FEEL-GOOD SPA.



HASGROHE SE

ADRESS: SCHILTACH , GERMANY
SHOWER SYSTEMS



HANSGROHE VERNIS BLEND SHOWERPIPE 200 1JET

Features:

Shower head size overhead shower: 205 mm

Spray type overhead shower: Rain

Overhead shower angle adjustable

Spray type hand shower: Rain, IntenseRain

Maximum flow rate (at 3 bar): 15.2 l/min

Flow rate of hand shower (at 3 bar): 15.2 l/min

Flow rate Rain (at 3 bar): 12.4 l/min

Exposed design allows easy installation, all working parts are
outside of the wall

Shower bar diameter: 19 mm

Height-adjustable slider with locking push-button slider

Shower arm length: 400 mm


Water connection: Metaflex shower hose 80 cm and 160 cm

Connection thread 1/2"

Suitable for continuous flow heater with an output of 18 kW

Min. operating pressure: 1 bar

Max. operating pressure: 10 bar





HANSGROHE SE

ADDRESS: SCHILTACH, GERMANY
SHOWER SYSTEMS

HANSGROHE LOGIS E BATHROOM MIXER

Features:

designed to run 1 function

Centre distance: 150 mm ± 12 mm

Maximum flow rate (at 3 bar): 22 l/min

Flow rate of hand shower (at 3 bar): 17 l/min

ceramic cartridge

Maximum temperature can be adjusted on installation

non-return valve

hose connection 1/2"

Connection type: S connections


Min. operating pressure: 1 bar

Max. operating pressure: 10 bar

WRAS 2206355

THE SHOWER HEAD

IF YOU WANT THE FAUCET. WE CAN ADD TO





HANSGROHE SE

ADRESS: SCHILTACH , GERMANY
SHOWER SYSTEMS

HANSGROHE CROMETTA S SHOWERPIPE 240 1JET WITH THERMOSTAT


FEATURES:

Are you toying with the idea of a renovation? The Crometta S shower pipe 240 1jet for exposed installation makes an uncomplicated upgrade in the shower possible: The thermostat can be mounted on existing water connections. The easy-care chrome surface convinces with durable quality.

Enjoy a multifaceted showering experience with the Crometta S shower system and water fun in two ways: The 240 mm round overhead shower with the full Rain spray mode and a water flow of max. 16 l/min offers a refreshing rain shower (XXL Performance). At the thermostat, you can switch to the hand shower's rain spray or switch to the revitalizing IntenseRain spray by turning the spray disc. The Crometta Vario hand shower can be conveniently adjusted to the desired height at the shower valve: ideal for shower fans of all ages in the family shower.

Safety lock at 40 °C (SafetyStop)

The Ecostat 1001 CL thermostat maintains the set target temperature, ensuring maximum comfort while showering. In the event of pressure fluctuations, the thermostat regulates at lightning speed, while the lock on the temperature setting prevents too-hot water from coming out of the shower unexpectedly.

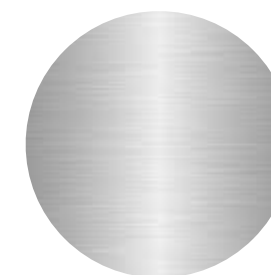



DURAVIT

ADRESS: HORNBERG , GERMANY
SINK / CLOSET

In 2017, Duravit is celebrating its 200 year anniversary. 200 years in which we made quality, design and technology our core competences.

It all began in Hornberg, Germany in 1817 when Georg Friedrich Horn built an earthenware factory initially focused solely on the manufacture of crockery. In 1956, production evolved from earthenware to porcelain, extending the product range to include sanitary ceramics.

SINK

DURAVIT CAPE COD TOP BATTERY WHITE SINK


48CM

With interior tap platform

Without overflow

Hardware included

Wondergliss surface finish will remain clean and attractive-looking for a long time to come





DURAVIT

ADDRESS: HORNBERG , GERMANY
SINK

DURAVIT CAPE COD TOP BATTERY WHITE SINK


46 CM

With interior tap platform

Without overflow

Hardware included

Wondergliss surface finish will remain clean and attractive-looking for a long time to come





HASGROHE SE

ADRESS: SCHILTACH , GERMANY

HANSGROHE FOCUS SINK BATTERY

hansgrohe Focus taps also excel at saving water: **The built-in EcoSmart technology automatically limits the flow of water to 5 l/min.** This reduces the impact on the environment and on your wallet, without diminishing your enjoyment of the water.



DURAVIT

ADRESS: SCHILTACH , GERMANY

DURAVIT D-NEO

D-Neo introduces a new attitude towards life in the bathroom. The range is impressive with its straight-line and its geometric shapes and it allows enough room for your personality to shine through. The individual elements of the complete bathroom range fit into any ambience - whether compact or spacious.



HASGROHE SE

ADRESS: SCHILTACH , GERMANY



HANSGROHE FOCUS M41 KITCHEN TAP 240

COMFORTZONE 240

swivel range adjustable in 2 steps to 110° or 150°

laminar spray, shower spray

lockable shower spray, spray returns through pressing
spray diverter and spray returns automatically
through handle closing

MagFit magnetic shower support

quick connect hose

connection dimension: DN15

maximum flow rate at 3 bar: 10 l/min

ceramic cartridge


connection type: G 3/8 connections

temperature limitation adjustable

integrated non-return valve

suitable for continuous flow water heaters

extension length up to 50 cm



HASGROHE SE

ADRESS: SCHILTACH , GERMANY



HANSGROHE FOCUS M41 KITCHEN TAP

260

Article features

handle can be positioned on the right or left

ComfortZone 260

swivel range adjustable in 3 steps 110°, 150° or 360°

Normal spray

connection dimension: DN15


maximum flow rate at 3 bar: 4,6 l/min

ceramic cartridge

connection type: G $\frac{3}{8}$ connections

temperature limitation adjustable

suitable for continuous flow water heaters





DURAVIT

DURAVIT RIMLESS

DNEO

2577390075

D-Neo introduces a new attitude towards life in the bathroom. The range is impressive with its straight-line and its geometric shapes and it allows enough room for your personality to shine through. The individual elements of the complete bathroom range fit into any ambience - whether compact or spacious.

